



CABLELOK mechanical seals




CABLELOK cable seal

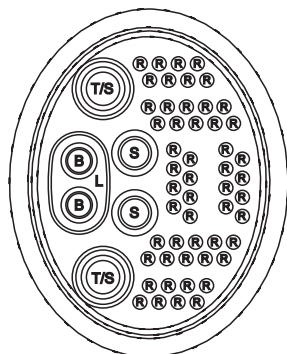

FDN
FDN IR
MUF-5



FRBU



UFC
MUF-3

Features:

- excellent sealing properties to 6 m head of water
- rapid and consistent installation - 2 minutes in comparison with heatshrink 20 minutes
- no heat required for installation eliminating the possibility of cable damage
- mounting possible under tight packing conditions
- 25 years warranty for installed seals
- used for the environmental sealing of cable entering a Hellermann jointing enclosure
- manufactured from a grade of flexible neoprene rubber, resistant to external environmental conditions
- sealing is achieved by a number of internal lips seals which are compressed onto the cable during installation
- a range of sizes for individual types are given in the table below

Selection method of CABLELOK sealing for entries in junction sheaths:

	cable port	part number	cable diameter range [mm]	pack size
R	R10	CABLELOK-R10	1,7 – 2,0	50
	R10D	CABLELOK-R10D	2 x 1,7 – 2,0	
	R20	CABLELOK-R20	3,0 – 3,8	
	R30D	CABLELOK-R30D	2 x 3,8 – 4,8	
	R40	CABLELOK-R40	3,8 – 5,2	
	R50	CABLELOK-R50	5,2 – 8,0	
	R70	CABLELOK-R70	6,0 – 8,5	
	R80	CABLELOK-R80	8,0 – 9,5	
	R99	CABLELOK-R99	port plug	
B	B10	CABLELOK-B10	4,8 – 9,0	25
	B20	CABLELOK-B20	8,0 – 14,0	
	B30	CABLELOK-B30	13,0 – 16,5	
	B99	CABLELOK-B99	port plug	
S	S10	CABLELOK-S10	5,0 – 8,5	20
	S20	CABLELOK-S20	8,0 – 12,0	
	S30D	CABLELOK-S30D	2 x 10,0 – 11,5	
	S40	CABLELOK-S40	12,0 – 16,0	
	S50	CABLELOK-S50	16,0 – 20,0	
	S99	CABLELOK-S99	port plug	
LM	LM10C	CABLELOK-LM10C	2 x 4,0 – 6,5	15
	LM20C	CABLELOK-LM20C	2 x 6,0 – 9,5	
	LM30C	CABLELOK-LM30C	2 x 9,0 – 12,5	
	LM40C	CABLELOK-LM40C	2 x 12,0 – 15,0	
	LM99C	CABLELOK-LM99C	port plug	
L	L10C	CABLELOK-L10C	2 x 5,5 – 9,5	10
	L20C	CABLELOK-L20C	2 x 9,0 – 12,5	
	L30C	CABLELOK-L30C	2 x 12,0 – 15,0	
	L40C	CABLELOK-L40C	2 x 15,0 – 18,5	
	L50C	CABLELOK-L50C	2 x 18,3 – 20,0	
	L99C	CABLELOK-L99C	port plug	
T	T10	CABLELOK-T10	15,5 – 22,0	10
	T20	CABLELOK-T20	20,0 – 23,5	
	T30	CABLELOK-T30	23,5 – 25,5	
	T40	CABLELOK-T40	24,5 – 29,0	
	T99	CABLELOK-T99	port plug	

Ordering:

B1- cable seal CABLELOK for cables of 9,0 - 14,0 mm diameter