



MUF-6 FIBRE OPTIC SPLICE CLOSURE

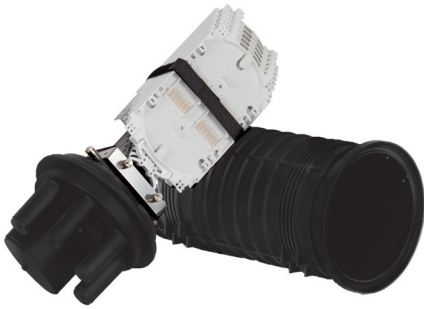

MUF - 6 Fibre Optic Splice Closure



Cable port configuration in the base

FEATURES:

- fibre optic splice closure dedicated for underground and aerial applications
- up to 24 splice trays dedicated for MUF-6/288
- max. 12 splices per tray for MUF-6/288, max. 24 splices per tray for MUF-6/144
- glass fibre reinforced, UV stabilised plastic cap
- possibility of storing reserves of uncut, loose loops of feeder cable tubes
- the cable ports in the base are environmentally sealed using heatshrink sleeves or self-amalgamating mastic (optional)
- possibility of mounting the closure with OH-3 bracket
- comply with the standard: ZN-OPL-008/14
- recommended cable retention frames:
 - SZ-3 (wooden poles)
 - SZ-2 (telecommunication manholes)

EQUIPMENT:

- splice enclosure
- dedicated splice trays
- heatshrink sleeves
- CABLELOK Cable Sealings or heatshrink sleeves - set
- mounting holder
- splice protectors

OPTIONAL EQUIPMENT:

- fibre manifold R-06
- self-amalgamating mastic

TECHNICAL SPECIFICATIONS:

| | MUF-6/144/S | MUF-6/144 | MUF-6/288 |
|---------------------------------------|--|----------------------|----------------------|
| max. number of entering cables | 6 | 12 | 12 |
| cable diameter range [mm] | up to 19 | do 21 | do 21 |
| number of splice trays | 6 | 24 | 24 |
| splice tray type/splice tray capacity | dedicated/24 splices | dedicated/12 splices | dedicated/12 splices |
| max. number of splices | 144 | 288 | 288 |
| cable sealing | heatshrink or self-amalgamating mastic | | |
| dimensions: height/diameter [mm] | 464/ø220 | 464/ø231 | 560/ø278 |
| fixing | OH-3 bracket | | |
| environmental IP protection | IP68 | | |