


Outdoor drop cable UNC1630

Features:

- for duct and aerial installations
- 1 or 2 fibres
- enables direct connection between the distribution point (e.g. on a pole) to the customer optical outlet
- low friction coefficient ensures easy sliding inside the duct

Technical specifications:

		1 or 2 fibres
temperature range [°C]	transportation and storage	-40 to +70
	installation	-5 to +50
	operation	-40 to +70
maximum pulling force [N]		800
crush resistance [N/cm]		200
minimum bending radius [mm]		60
standard packaging		2100 m or 4200 m drums
nominal diameter [mm]		6
nominal weight [kg/km]		31
outer sheath designation		year and week of manufacturing-ACOME-number and type of fibres-product code + metric

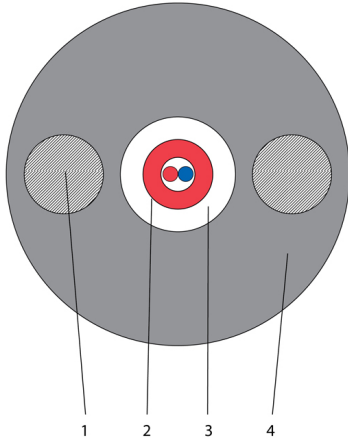

1. FRP strength members
2. 1 or 2 fibres in easy strip tube
3. water blocking yarn
4. HDPE outer sheath

Outdoor drop cable UNC1630