

SPLICE TRAYS WITH SPLITTERS

FEATURES:

- mechanical protection for passive optical devices
- 250 μm fibre leads (dedicated for splicing), 900 μm buffered fibre terminated with customer defined connectors
- dedicated for installation in a wide range of ODFs and splice closures from OPTOMER product portfolio


ORDERING:

KS-S-SPL1x1x4/1316/1.5m/900/5E2A - splice tray with built in 1x4 splitter, 1.5 m, 900 μm buffered fibre leads terminated with E-2000/APC connectors


FTTx

PON

xWDM

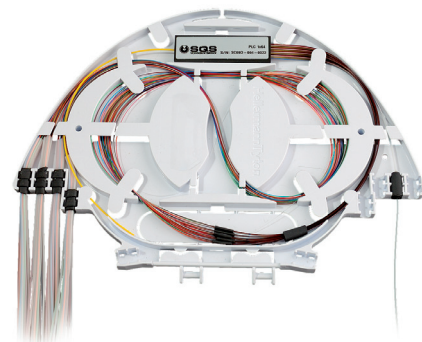

*KSH splice tray
with built in PLC 1x16 splitter*

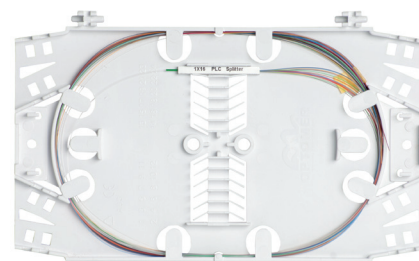

*KS-24 splice tray
with built in PLC 1x16 splitter*