

CCU5031 AERIAL CABLE


FEATURES:

- aerial cable for power network poles installation
- 60 to 84 fibres
- pole span up to 200 m under different weather conditions
- water and gunshot resistant
- safe to use on power network poles

TECHNICAL SPECIFICATIONS:

		60 to 84 fibres	
		CCU	CCU extended
temperature range [°C]:	transportation and storage	-40 to +70	
	installation	-5 to +50	
	operation	-40 to +70	
maximum pulling force [N]		> 20 000	
crush resistance [N/cm]		450	
minimum bending radius [mm]		150	
tightness		resistant against longitudinal water penetration	
standard packaging		2 km or 5 km drums	
nominal sheath thickness [mm]		1,2	
nominal diameter [mm]		14,0	15,5
nominal weight [kg/km]		163	194
outer sheath marking		year and week of manufacturing-ACOME-number and type of fibres-product code + metric	

CCU5031 Aerial Cable

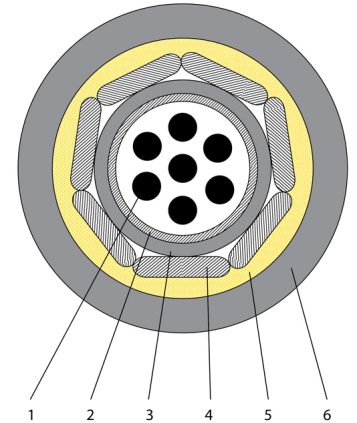

1. 6, 8 or 12 fibres tube
2. Water barrier
3. Thermoplastic central tube
4. Strength members (fibre reinforced plastic)
5. Aramid yarns
6. HDPE outer sheath