


# Fibre optic distribution/splice cabinet PSS-3/576

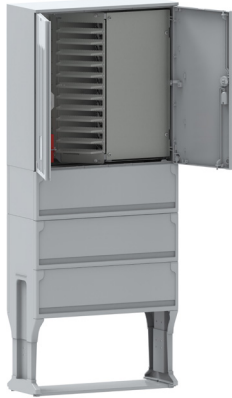

Fibre optic distribution/splice cabinet PSS-3/576

## Description:

The PSS-3/576 fiber optic patch distribution/splice cabinet is designed for outdoor use as a distribution element in optical access networks. Drop cables as well as bundles of fibers and minicables for blowing can be entered to the cabinet.

## Features:

- installation of up to 9 optical splitters (connectorised, max. dimensions: 140x115x18 [mm])
- termination of up to 576 fibers from cables led to customers
- termination of 12 fibers from the cable coming to the cabinet from the telecommunication central office

## Equipment:

- lockable housing
- inset
- splice trays
- cable accessories, ties, etc.

## Technical specifications:

	PSS-3/576
number of patching fields	288x SC Duplex (subscriber) + 9x SC (drop)
number of subscriber splices	576
number of drop splices	12
dimensions width x height x depth [mm]	800x1750x320
environmental IP protections	IP54