



PS-19/HD 1U Fibre Optic Patch Panel

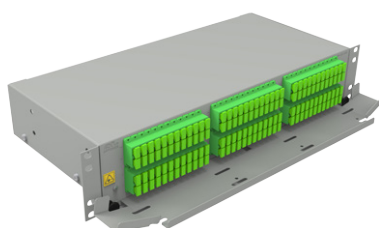

PS-19/HD 2U Fibre Optic Patch Panel

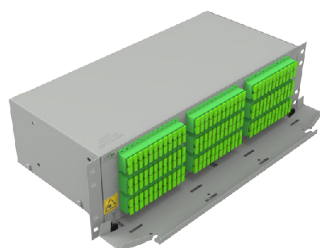

PS-19/HD 3U Fibre Optic Patch Panel



PS-19/HD 4U Fibre Optic Patch Panel

PS-19/HD Fibre Optic Patch Panels

Features:

- Installation in 19" racks with a minimum depth of 300 mm, e.g. STP-19M
- SC Duplex adapters
- Termination of up to 288 fibres
- Drawer design with full front access to the splice trays
- Installation in 21" and/or 23" racks with the use of AD-19 adapters

Components:

- Adapter front plate
- KS-24 splice trays
- Bands and cable ties
- Installation and maintenance instructions
- Installation kit

Additional accessories:

- DP /D/ cable gland
- PO-1, PO-2 Patchcord Management Shelves
- PP-19 Patchcord Guide
- Anti-rodent cover

Technical Specifications:

Patch Panel type	PS-19/HD/72 1U	PS-19/HD/144 2U	PS-19/HD/216 3U	PS-19/HD/288 4U
Dimensions: Width/Depth/Height [mm]	483 x 200 x44	483 x 200 x88	483 x 200 x132	483 x 200 x175
Maximum splice capacity	72	144	216	288
The number of connectors on the front plate	36	72	108	144
Connector standard	SC Duplex			
The number of splice trays, each with a capacity of 24 splices	3	6	9	12
Recommended pigtail length, 0.9 mm buffered fibre [m]	2,5			