


# Wall-mounted access network distribution splice box PRW-32U, PRW-64U



Wall-mounted access network distribution splice box PRW-32U

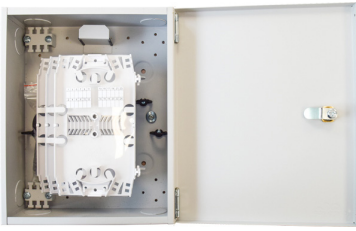

Wall-mounted access network distribution splice box PRW-64U

## Features:

- wall-mounted access network distribution splice box dedicated to connect fibres of feeder cables with subscriber cable fibres
- used as a fibre distribution box in multi-dwelling units
- stores up to 7 splice trays (PRW-64U)
- capacity up to 32 subscriber connections
- 2 prepunched cable entries on each side wall
- each cable entry for up to 3 cables
- hinged splice trays each accommodating 24 splices
- adapter plate to connect inputs of four splitters
- dedicated splice tray to connect feeder cable fibres
- powder paint finished steel box

## Equipment:

- Lockable housing
- Splice trays
- ø37 mm duct entry plugs
- Cable ties, small
- Cable ties, large
- Protective tape
- TPI table for descriptions
- Mounting kit

## Optional equipment:

- OZRWL – cable marker roll dispenser (self-adhesive)
- SZKLD – easy access cable coiling box

## Technical specifications:

	PRW-32U	PRW-64U
dimensions: height/width/depth [mm]	305/251/105	375/381/125
number of splitters (minihousing)	max. 4	
maximum number of splices	72	168
recommended number of connections – subscriber side	32	64
recommended number of connections – feeder side	4	
number of cable entries	8	9
maximum diameter of the entering cable	ø37	
housing material / colour	powder coated steel sheet / RAL 7035	
environmental IP protection	IK41	