

MPS-DC-2MPO/24SC Module

Features:

- Designed for solutions using MPO connectors (Multi-Fiber Push On Connector)
- Using MPO connectors can improve the throughput and reliability of connections made in a smaller space
- Provides maximum space savings in IT cabinets and reduces installation time
- MPO connectors are available in male (with pins) and female (without pins) versions. Both are mated using an MPO adapter
- 12-fibre MPO connectors are the most commonly used; 24-fiber connectors are also available
- The frame allows:
 - Installation of up to two MPO adapters
 - Installation of 12 SC Duplex adapters; 24 x SC connector plugs
 - Storage of slack patchcord cables in a dedicated patchcord storage tray
 - Installation in PSM-19/144/3U Modular patch panels. Increased capacity from 144 to 288 SC connectors

Accessories:


- 1 x MPS-DC-2MPO/12SC module frame
- 1 x patchcord storage tray
- 1 x rubber protective o-ring

Additional accessories:

- MPO-SC-12J-1 patchcord
- SC adapter

Technical Specifications:

	MPS-DC-2MPO/24SC Module
Dimensions [mm]: Width x Height x Depth	35x128,5x205
Maximum number of MPO connectors	2
Maximum number of SC connectors	24
Adapter standard on front panel	SC
Maximum length of a single slack fibre [m]	1

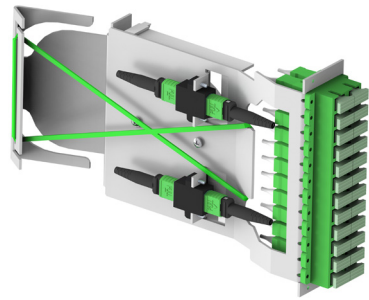

MPS-DC-2MPO/24SC Module